


| REVISIONS          |            |                                      |      |      |
|--------------------|------------|--------------------------------------|------|------|
| REV                | DATE       | DESCRIPTION                          | CHG  | APPR |
|                    | JAN 14 '11 | CHG NAME (WAS QSZ Z-CL 35SQ AS-P39). | Y.S. | Y.S. |
| PRODUCTION RELEASE |            |                                      |      |      |

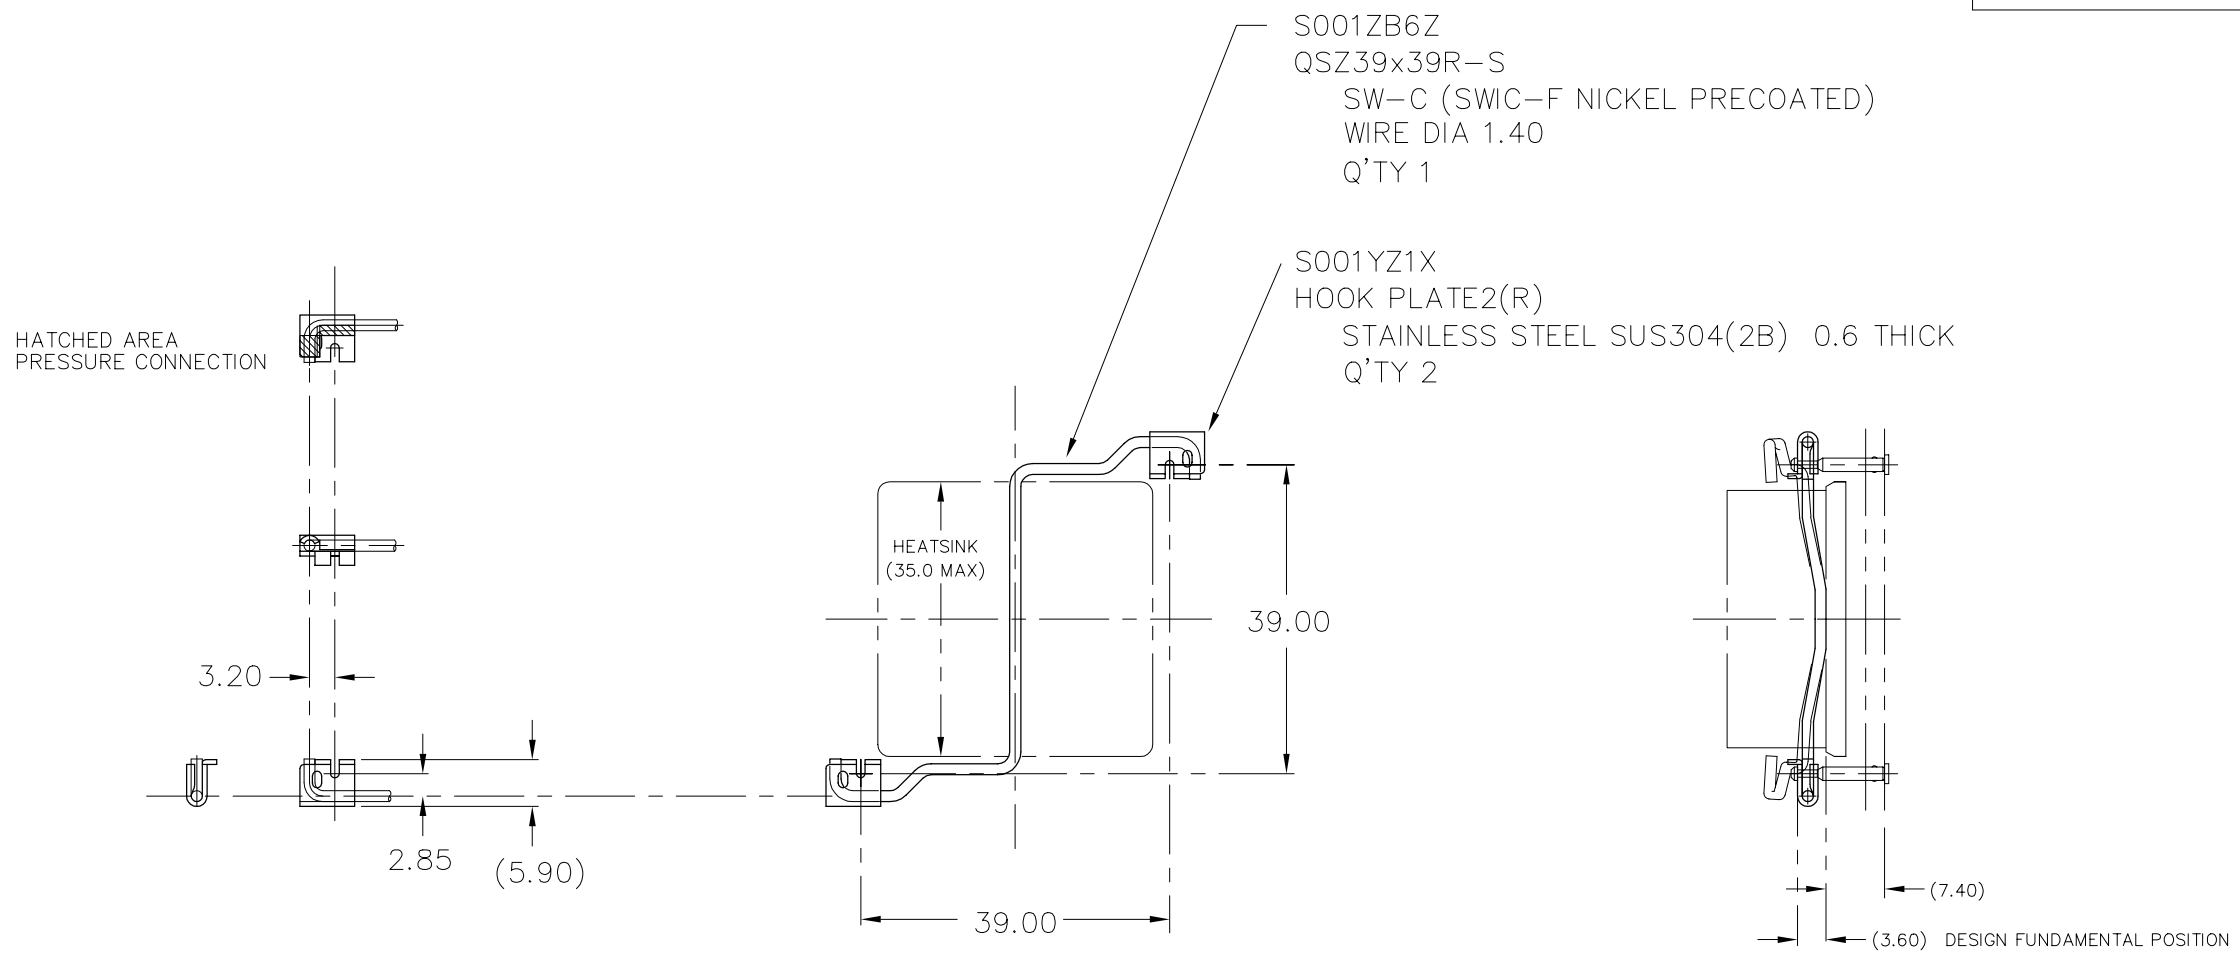

ANCHOR LAYOUT ON BOARD  
 REQUIRES  $\phi 1.80 \pm 0.05$  THRU HOLES  
 FOR ANCHORS IN BOARD.

- NOTES : UNLESS OTHERWISE SPECIFIED
1. INTERPRET DIMENSIONS AND TOLERANCES PER ANSI Y14.5M
  2. ALL DIMENSIONS ARE IN MILLIMETERS.
  3. TOLERANCES :  
 .XX  $\pm 0.254$   
 .XXX  $\pm 0.127$   
 ANGLES  $\pm 3^\circ$

| ITEM                  | PART NO.    | PART NAME          | REMARK | Q'TY      |
|-----------------------|-------------|--------------------|--------|-----------|
| <b>ALPHA CO.,LTD.</b> |             | CSTMR'S PART NO.   |        |           |
|                       | MATERIAL    |                    | NAME   | QSZ39x39R |
| SCALE                 | APPR & CHCK | PART NO. & DWG NO. |        | REV       |
| 1 : 1                 | Y.SUZUKI    | S001ZB6W           |        |           |
| DATE                  | DSGN & DWG  | RDCTN:             | LOFF:  |           |
| NOV 09. 2010          | Y.SUZUKI    |                    |        |           |