


ALPHA

# U60C/U60 Installation Guide

Aug, 2001


X001ZF0L-02

asymmetrical, with an off-center pressure point. This pressure point must go directly over the CPU die. The long side of the clip goes over the side of the heat sink with large step machined in the base. This side of the clip then will attach to the cam box side of the CPU socket.

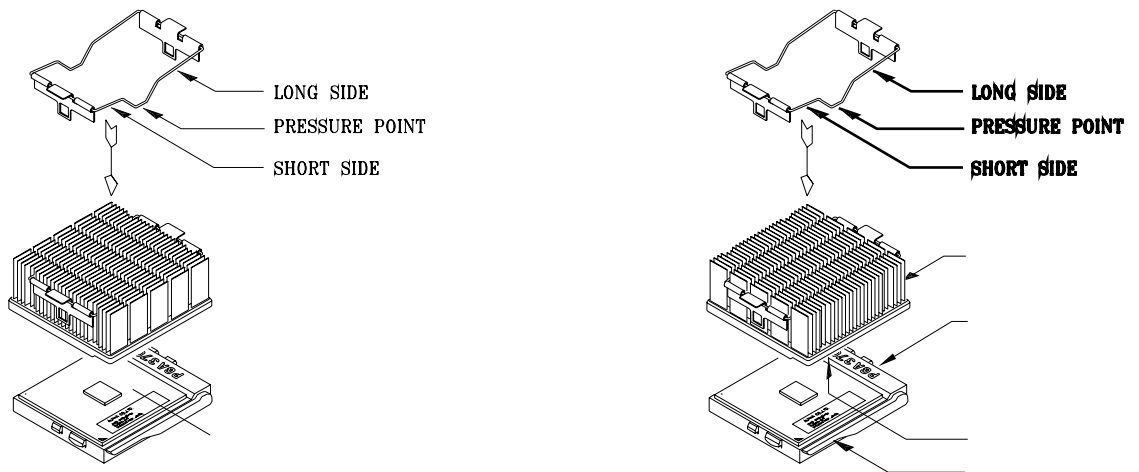

of PADS (see below), the use of a mild solvent, such as isopropyl alcohol or acetone (nail polish remover), would be ideal.

- Attachment to FC-PGA.  
Apply PADS to the four points on the heat sink base shown in the right-hand side figure. (PADS which remain are spares.)
- For the attachment to Athlon, Duron and PPGA chips.  
Do not use PADS.

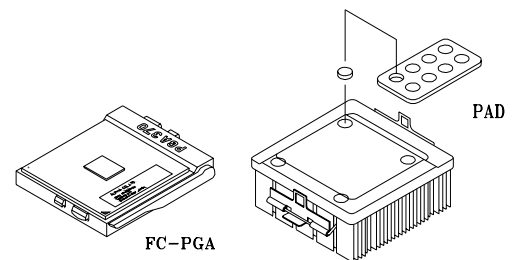

do not use excessive force. Make sure the clip is installed correctly on socket tab.

**STEP 6** Final assembly inspection:

Prior to powering up the CPU, visually inspect the heatsink to ensure it is sitting level on the CPU. Ensure that the heat sink base is only making contact with the CPU die, not the socket cam box or lever arm.