
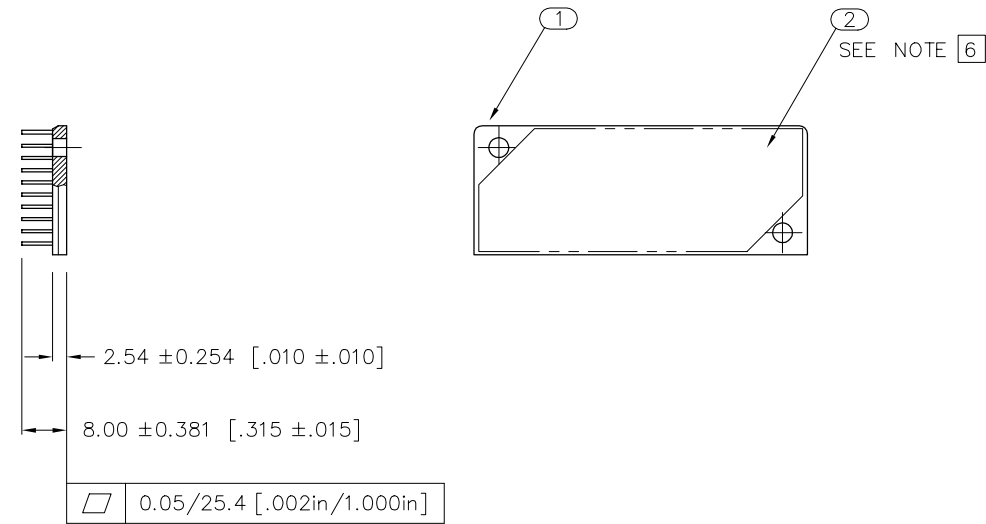


REVISIONS				
REV	DATE	DESCRIPTION	CHG	APPR

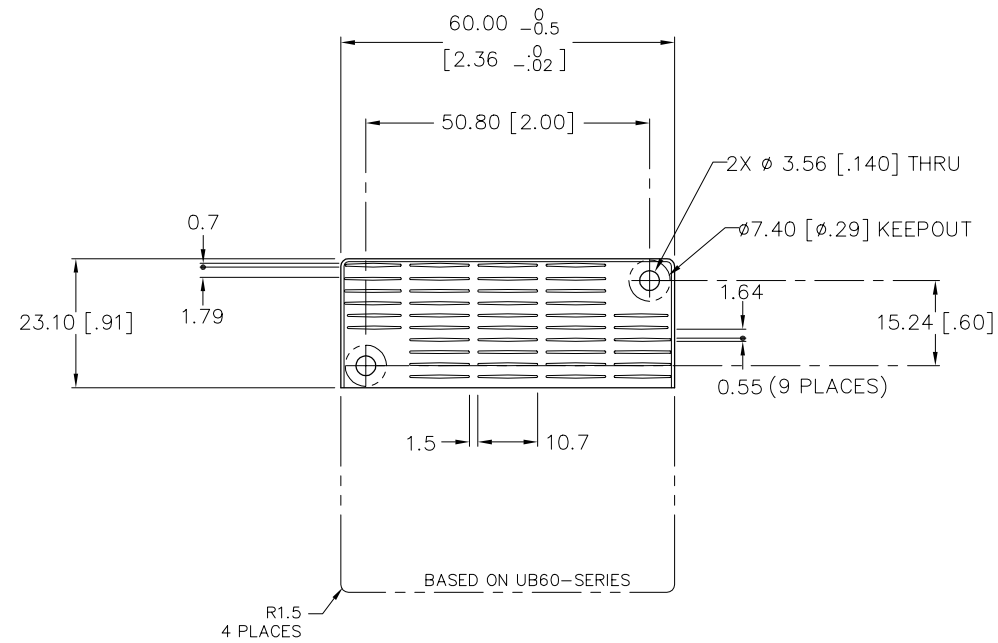

NOTES : UNLESS OTHERWISE SPECIFIED

1. INTERPRET DIMENSIONS AND TOLERANCES PER ANSI Y14.5M
2. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
3. TOLERANCES :
 .XX ±0.254 [.010]
 .XXX ±0.127 [.005]
 ANGLES ± 1°
4. REMOVE ALL BURRS AND BREAK SHARP EDGES. UNSPECIFIED CORNER R0.5 MAX OR C0.5 MAX
5. A BEND OF THE FIN IS LESS THAN 3 DEGREES. THE FINS MUST NOT CONTACT.

6. PEEL ONE SIDE OF LINER FROM THERMAL PAD. APPROXIMATE POSITION SHOWN IN A FIGURE AND ADHERE TO HEATSINK.

②	-----	< TIM >	Laird Technologies (Thermagon) PHASE CHANGE MATERIAL T-PCM905C 22x49mm CHAMFER 10.0(x2)	1
①	-----	<HEATSINK> DCC2360U-8BM	6063 ALUMINUM BLACK ANODIZE	1
ITEM	PART NO.	PART NAME	REMARK	Q'TY

ALPHA CO.LTD.		CSTM'R'S PART NO.		
	MATERIAL	NAME DCC2360U-8BMT		
SCALE 1:1	APPR & CHCK -----	PART NO. & DWG NO.	REV	
DATE FEB 08. 2008	DSGN & DWG -----	RDCTN:	LOFF:	